


IBIX 40 PORTABLE POWER BLASTING SYSTEM

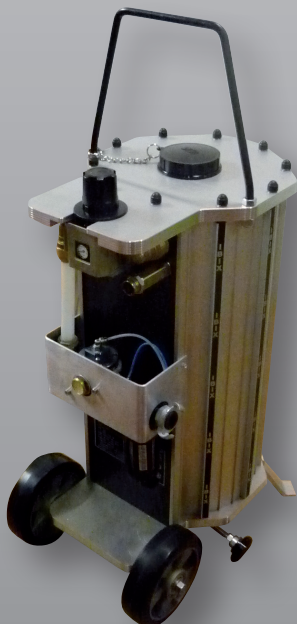

TECHNICAL CHARACTERISTICS

- Pressure adjustable: from 2 bars to 8 bars
- Safety valve set at 9 bar
- Compressed air volume requirements: minimum 5000 l/min
- Standard nozzle: internal Ø 10 mm cylindrical nozzle
- Other applicable nozzle: internal Ø 12 mm cylindrical
- Blasting medium-air hose (no sheath): 10 m (other length upon request)
- Blasting medium tank capacity: 40 l (approx. 80 kg of blasting media)
- Max height: 940 mm
- Max width: 450 mm
- Weight (empty tank): 40 kg
- Fully made of extruded aluminium